



**LIA® 0602 Low Inductance 6Awg  
2-Cdr (UL) TC-ER 600V 90°C**

**A:** 6 AWG 2 Conductor Bare Copper with PVC/Nylon Insulation with BC Spiral Wrap and a PVC Binder  
Wire Size & Stranding: 6 AWG 19/B787 - 26240  
Circular Mil Area - 0.4122 Ω/Mft Maximum DC Resistance @ 20°C (1.348 Ω/km Maximum @ 20°C)  
Metal Type: Annealed Bare Copper  
Nominal Wire Diameter: 0.180

Insulation Type: Polyvinylchloride/Nylon  
Nominal Insulation Thickness: 0.030 / 0.006  
Nominal Conductor Diameter: 0.242 / 0.252  
Nominal Inductance: 0.067 μH/ft  
Color Code: Red

Bare Copper Spiral Wrap Shield - 26240 Circular Mil Area - 0.4122 Ω/Mft Maximum DC Resistance @ 20°C (1.348 Ω/km Maximum @ 20°C)

Binder Nominal Jacket Thickness: 0.030  
Binder Jacket Colors: Black #1, Black #2  
Binder Nominal Diameter: 0.378


**B:** 8 AWG Uninsulated Bare Copper Ground  
Wire Size & Stranding: 8 AWG 7/0.0486  
Metal Type: Annealed Bare Copper  
Nominal Wire Diameter: 0.145

**C:** Non-Hygroscopic Polypropylene Fillers - as Necessary for a Circular Cross-Section

**D:** Clear Mylar Tape Binder - 100% Coverage

**E:** 12 AWG 7 Strands Tinned Copper Drain Wire

**F:** Aluminum/Mylar/Aluminum Tape Shield - 100% coverage

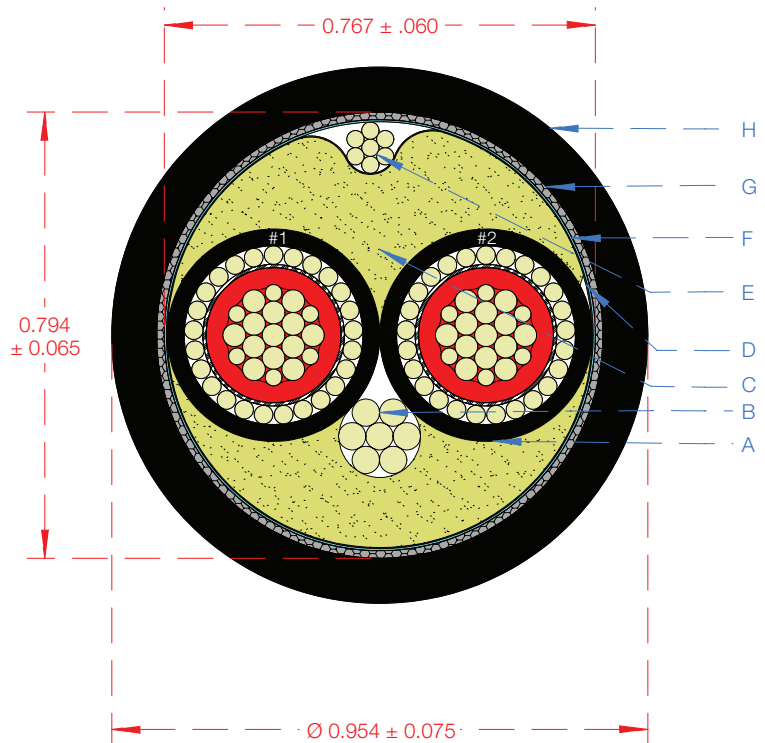

**G:** Tinned Copper Braid Shield - 65% minimum coverage

**H:** Black Polyvinylchloride Jacket, Nominal Jacket Thickness: 0.080, Tube/Sleeve Extruded  
Temperature Range: -40°C to 90°C, (UL) TC-ER 90°C DRY/WET 600 Volts

**Legend:** LIA® 0602 6AWG 2C SHIELDED (UL) TC-ER THWN-2/VV-1 UNINSULATED GROUND 600V 90C DRY/WET PVC JACKET SUN RES DIR BUR FT4 "ROHS COMPLIANT" MADE IN USA

**NOTES**

- Print Type: Inkjet
- Footage Markers: Yes
- Ripcord: Yes (2-Ply)
- Weight: 720 Lbs/Mft

**DALLAS • DETROIT**

Corporate Offices: 359 Robbins Drive • Troy, MI 48083  
Phone: 888.8.CABLCON • Fax: 248.588.1462 • [www.cablcon.com](http://www.cablcon.com)

