


## REMOTE RADIO HEAD (RRH) POWER TRUNK CABLE



**6awg 6 Conductor Shielded (UL)  
TC-ER 600V 90°C**

- A:** 6 AWG Class B 19 Strand Annealed Tinned Copper Conductors Max DC Resistance: 0.44 ohms/Mft.  
Insulation Type: Polyvinylchloride/Nylon Type THWN-2/VW-1  
Color Code: Red/Blue, Black/Blue, Red/Orange, Black/Orange, Red/Green, Black/Green
- B:** 8 AWG 19 Strand Uninsulated Annealed Tinned Copper Ground Wire
- C:** Non-Hygroscopic Polypropylene Fillers with Clear Polyester Tape
- D:** Outer Shield Aluminum/Polyester 100%
- E:** 36 AWG Annealed Tinned Copper Outer Braid Shield 65% Minimum Coverage
- F:** 12 AWG 7 Strand Uninsulated Annealed Tinned Copper Drain Wire
- G:** Black Jacket Polyvinylchloride, Nominal Jacket Thickness: 0.080" Sunlight and Oil I Resistant (UL) Listed TC-ER 600V, 90oC Dry/Wet, FT4  
Environmental Specifications:  
Temperature Range: -40°C to 90°C (-40°F to 194°F),  
UV resistant for outdoor and/or direct burial applications.  
NEC Article 336

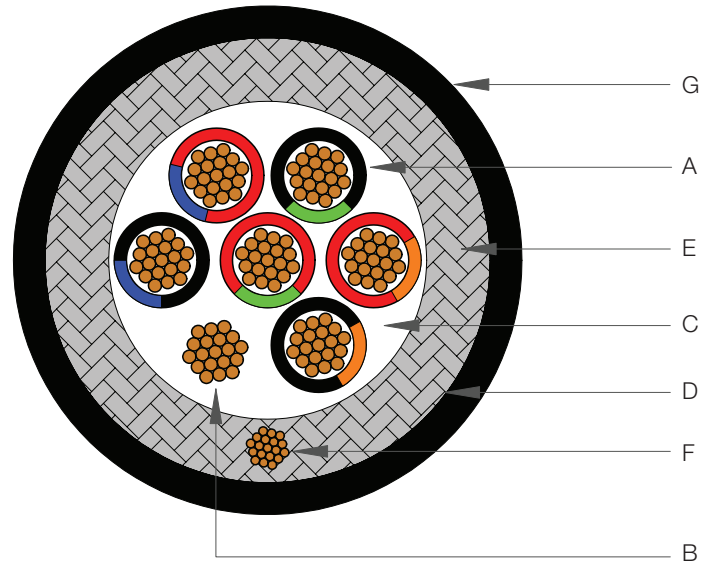

**Legend:** CABLCON LIA® 6awg 6-cdr RRH-PWR-0606 (UL) TC-ER 600V. THWN-2/VW-1 90oC DRY/WET SUN RES DIR BUR OIL RES I FT4 "ROHS COMPLIANT" MADE IN USA E478019

### NOTES

- Print Type: Inkjet
- Footage Markers: Yes
- Ripcord: Yes (2-Ply)
- Weight: 886 Lbs/Mft

**DALLAS • DETROIT**

Corporate Offices: 359 Robbins Drive • Troy, MI 48083  
Phone: 888.8.CABLCON • Fax: 248.588.1462 • [www.cablcon.com](http://www.cablcon.com)

**TL9000**

